


# FPSHX 80 - TECHNICAL DATASHEET

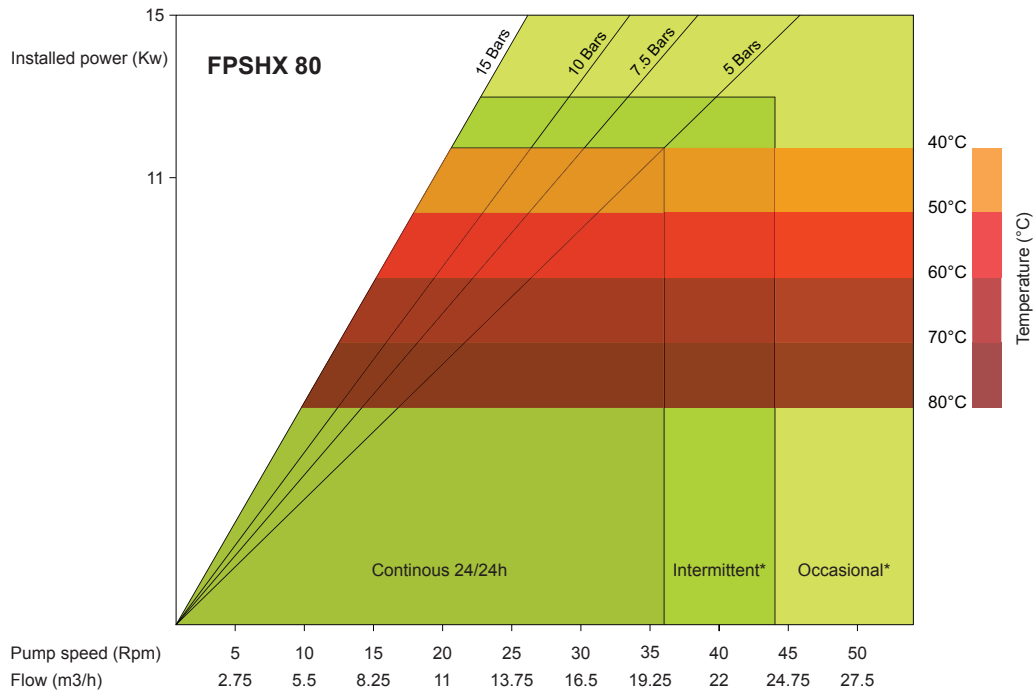


\* Intermittent use: Minimum of 1 hour stop after 2 hours use \* Occasional use: Maximum 1 hour per day

SHOE SHIMMING TABLE - FPSHX 80		
Pressure bar (psi)	Speed - Rpm	Number of shims - thickness 0.5 mm
$\Delta P \leq 5$ (72,5)	0 to 25	0
	25 to 65	0
$5$ (72,5) $\leq \Delta P \leq 7,5$ (108,75)	0 to 25	2
	25 to 46	1
$7,5$ (108,75) $\leq \Delta P \leq 10$ (145)	0 to 25	3
	25 to 40	2
$10$ (145) $\leq \Delta P \leq 15$ (217,5)	0 to 25	4
	25 to 31	3

Beware: Remove one shim If Temperature exceeds 60° Celsius (140° Fahrenheit)

## Dimensions

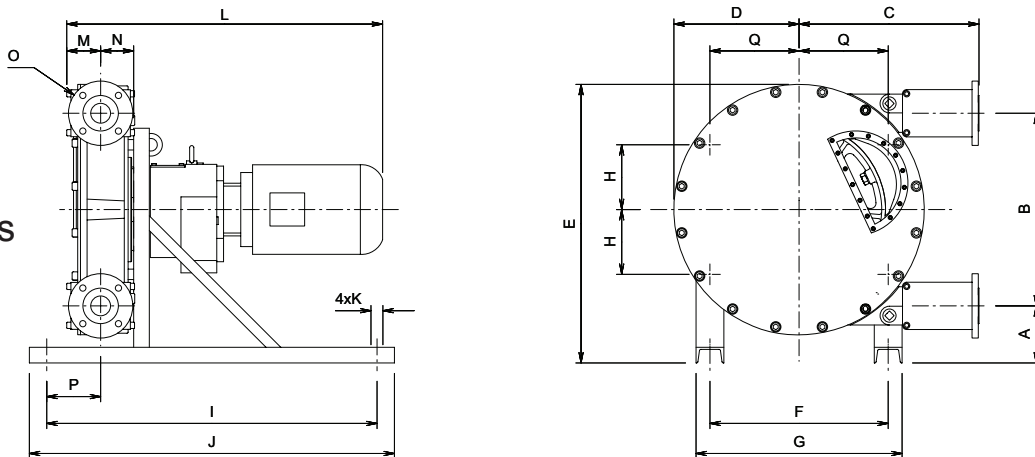

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
FPSHX 80	158	746	604	473	1004	580	680	290	1150	1250	4xø19	-	129	133	DN80 PN16	167	290

ALL DIMENSIONS AND TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE